

HEATDECK



Product Information & Technical Data Sheet

Resonate **HEATDECK** is a low profile high performance underfloor heating board. Manufactured from reinforced gypsum, the CNC routed panels are engineered to provide optimum underfloor heating conditions in new build and refurbishment developments.


Boards are available in 15, 18 and 25mm thicknesses.

Dry, Efficient and Fast


HEATDECK is a 100% dry system that is able to accept floor finishes (carpets, wood floors, ceramic tiles etc) within 24 hours of installation. A significant time saving benefit over wet system alternatives.

The underfloor heating pipes are laid inside the **HEATDECK** panels routing pattern. The highly conductive boards transfer the heat from the underfloor heating pipes quickly, efficiently and effectively underfoot and into the surrounding room.

Key Benefits



Efficient and fast transfer of heat



Suitable for all types of 10, 12, 16mm pipework




High heat retention



Can be installed as an acoustic system on separating floors




CNC routing options:
Straights, circles, radius returns and universal

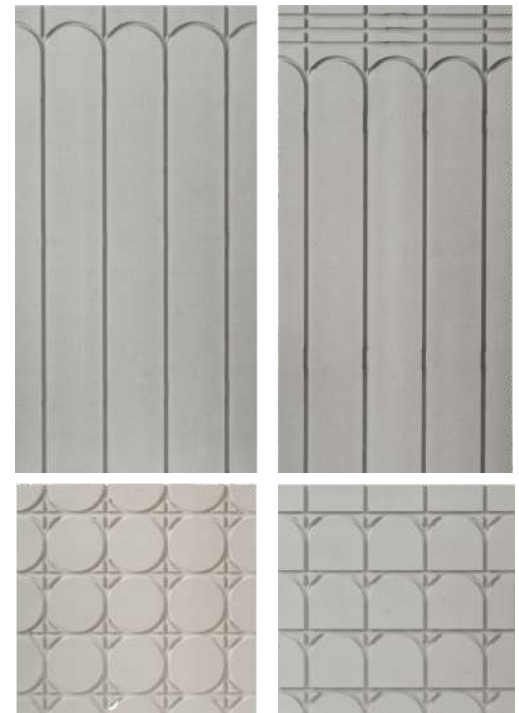

System Components

1. Resonate **HEATDECK** floor panel
2. **ResoThermEdge** Flanking strip
3. **GYPDECK** Adhesive

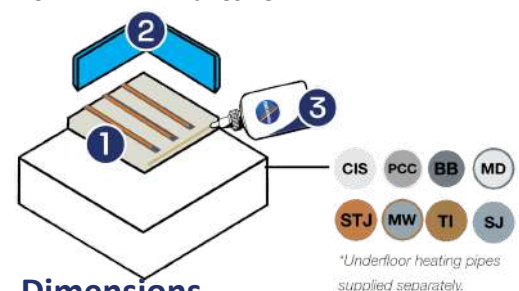

*Underfloor heating pipes supplied separately.

Dimensions

Pallet Dimensions

Straights

600mm (W)
1200mm (L)
15/18/25mm (H)

Circles & Returns

600mm (W)
600mm (L)
15/18mm (H)

300mm (W)
600mm (L)
15/18mm (H)

Universal

600mm (W)
1200mm (L)
15/18mm (H)

Panel Weight (18mm)

1200 X 600 = 14.5 kg per panel
800 X 600 = 9.8 kg per panel
600 X 600 = 7.4 kg per panel
300 X 600 = 3.6 kg per panel

Density

1200 kg/m³

Tolerances

Length & Width = +/- 2mm
Height = +/- 0.2mm

Thermal

Conductivity
0.32 W/mk

Product Applications

Concrete In-situ Floor

CIS




1. Ceramic tiles
2. ResoThermEdge flanking strip
3. UFH pipes laid in Resonate HEATDECK
4. Levelling compound to achieve SR2 flatness
5. 200mm Reinforced insitu concrete slab
6. MF Ceiling (min 100mm void)
7. 1 x 9.5mm acoustic plasterboard



Dry HEATDECK panels
reduce build times
compared to wet screeds

Solid Timber Joisted Floor

STJ

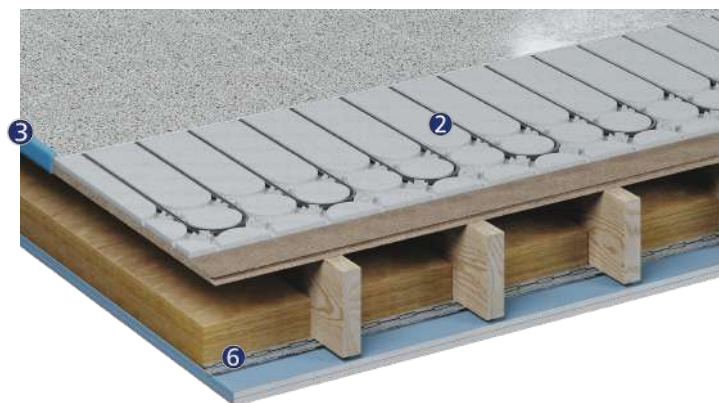

1. Ceramic tiles
2. UFH pipes laid in Resonate HEATDECK
3. ResoThermEdge flanking strip
4. 200mm (min) timber joists
5. 100mm 45kg/m³ mineral wool
6. 30mm ResoBar resilient bars
7. 2 x 15mm acoustic plasterboard



Dry HEATDECK panels
reduce build times
compared to wet screeds