



ResoEdgeRoll

Product Information & Technical Data Sheet

Resonate's **ResoEdgeRoll** are high performance straight edge acoustic flanking strips. They are installed in conjunction with our acoustic flooring and wall lining products to isolate the treatments from walls, skirting boards and all abutments, reducing the risk of flanking transmission occurring and acoustic failure.

Essential Soundproofing


ResoEdgeRoll are an essential component of an acoustic system, failure to install them can result in Part E regulation failure.

Available in multiple lengths, widths and thickness' **ResoEdgeRoll** can be used in conjunction with various Resonate floor and wall products. Our technical team are available to advise you on the most suitable combination for your project



System Components

1. Resonate **ResoEdgeRoll** acoustic flanking strips

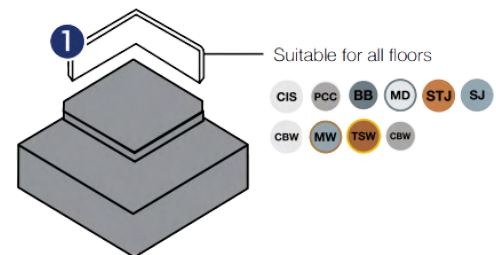

Dimensions

Strip Size

5mm x 100mm x 25m
5mm x 150mm x 50m
5mm x 100mm x 50m
5mm x 60mm x 50m

Working Temperature

-40 / 60 degrees C

Water Absorption

0.02 - 0.03 mg/cm²

Material

Extruded closed cell polyene foam

Colour

White

Key Benefits



Isolate floors and walls to prevent floors failing Part E sound testing



Available in multiple widths



Light weight, easy to handle and quick to install



**100% recyclable
Zero VOC's, Zero CFC's
Zero ODPs, GWP <5**